


EVOLUTION

UP 35 FLAPS+ EXTENSIONS



EFFEMME

LAYOUT

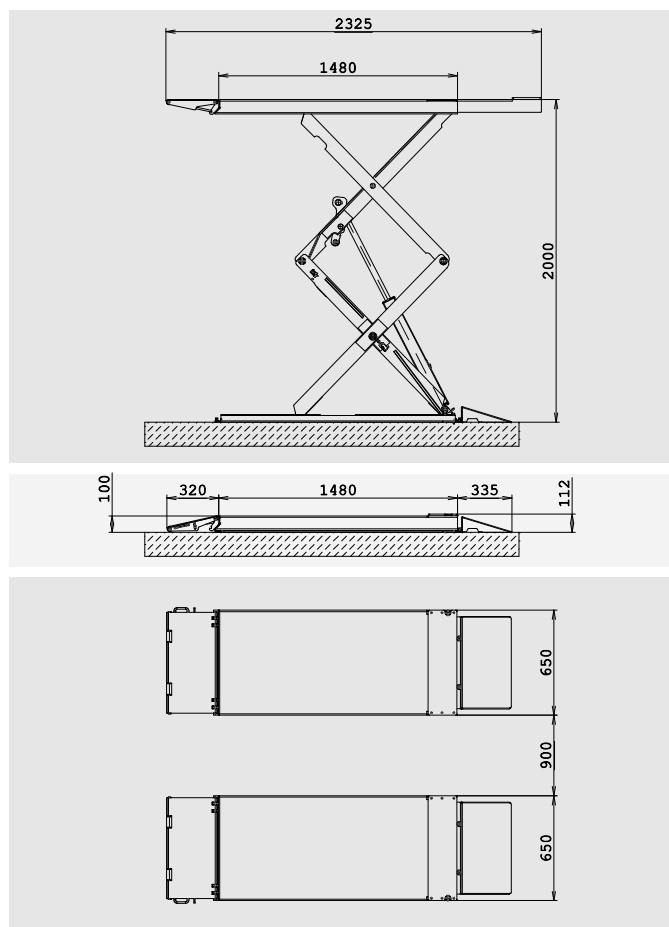

EVOLUTION UP 35



FEATURES

- ▶ **DOUBLE SCISSOR LIFT** with **DOUBLE HYDRAULIC-VOLUMETRIC SYNCHRONISM**
- ▶ one side of the platforms with **EXTENSIONS**, other side with **FLAPS**
- ▶ Installation: **on floor or inground**
- ▶ Minimum height: **100 mm**
- ▶ **MAX PRESSURE VALVE** to prevent lifting of load exceeding the nominal capacity
- ▶ **CYLINDERS** made by our factory **HTC**
- ▶ **CONTROL UNIT** with low voltage command (24V)
- ▶ **LEVER** with cold galvanizing treatment
- ▶ **HOT GALVANIZED BASE FRAME**
- ▶ Fully reversible
- ▶ Hydraulic system equipped with safety mechanism in case of failure due to broken tubes
- ▶ Device for manual descent in case of power failure
- ▶ **PHOTOCELLS** detect any desynchronizations and immediately stop the lift

TECHNICAL DETAILS

- ▶ Operation: **ELECTRO-HYDRAULIC**
- ▶ Capacity: **3.500 Kg**
- ▶ Weight: **800 / 900 Kg**
- ▶ Lifting time: **40 sec.**
- ▶ Lowering time: **40 sec.**
- ▶ Motor: **2,2 KW, 220/380 V, 50 Hz**
- ▶ Current: **5,3 A**
- ▶ Working temperature: **-10 °C / 40 °C**
- ▶ Working max pressure: **260 bar**



HTC srl - P.I. 01607910674
Via degli elettricisti - 64025 Pineto ITALY
Tel. +39 085 9463008 - info@effemme.biz

www.effemelifts.com



CERTIFICATE NO.
18495/A/0001/UK/IT